



WORK ZONE



PHASE 3

CONSTRUCTION PHASING

TERMINI OF THIS PHASE ARE CHESHAM CIRCLE AND 300 FEET SOUTH OF WINDMILL AVENUE.



- OBLITERATE EXISTING STRIPING ON NORTHBOUND LANES OF CENTENNIAL BLVD. PLACE TEMPORARY STRIPING ON NORTHBOUND LANES OF CENTENNIAL BLVD.
- SHIFT TRAFFIC TO EXISTING NORTHBOUND LANES OF CENTENNIAL BLVD. PROVIDE ONE 11' (MIN) LANE OF TRAFFIC IN BOTH DIRECTIONS. PROVIDE TURN LANES WHERE POSSIBLE.

NOTES

1. ACCESS SHALL BE MAINTAINED AT ALL TIMES (FULL-CLOSURE NOT PERMITTED).
2. DRIVEWAY ACCESS SHALL BE MAINTAINED AT ALL TIMES UNLESS APPROVED IN WRITING BY RESIDENTS AND/OR PROPERTY OWNERS. CONTRACTOR SHALL COORDINATE WITH RESIDENTS AND/OR PROPERTY OWNERS.
3. MEDIAN MAY BE REMOVED AND TEMPORARY PAVEMENT INSTALLED TO FACILITATE TRAFFIC CROSSOVER.
4. PEDESTRIAN ACCESS SHALL BE MAINTAINED AT ALL TIMES. CONTRACTOR SHALL COORDINATE WITH SPECIAL NEEDS RESIDENTS AND MOUNTAIN METRO TRANSIT.
5. BIKE LANES MAY BE REMOVED IN LOCATIONS OF LANE REDUCTIONS. CONTRACTOR SHALL COORDINATE WITH CITY TRAFFIC, PARKS, AND COMMUNICATION FOR DETOURS AND NOTIFICATIONS.

THE FOLLOWING CONSTRUCTION ITEMS LOCATED WITHIN THE PHASE TERMINI AND LEFT OF CENTERLINE ALIGNMENT WILL BE INCLUDED IN THIS PHASE:

- REMOVE CURB AND GUTTER, MEDIAN CONCRETE COVER MATERIAL, MEDIAN LANDSCAPING AND ASPHALT PAVEMENT
- CONSTRUCT INLETS AND UNDERDRAINS
- CONSTRUCT CURB AND GUTTER, CONCRETE CROSS-PANS AND FULL-DEPTH CONCRETE PAVEMENT SECTION
- CONSTRUCT / RECONSTRUCT PEDESTRIAN RAMPS AND SIDEWALK
- TEMPORARY STRIPING OF PAVEMENT

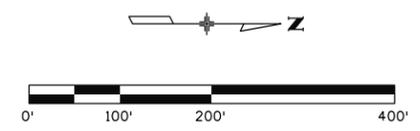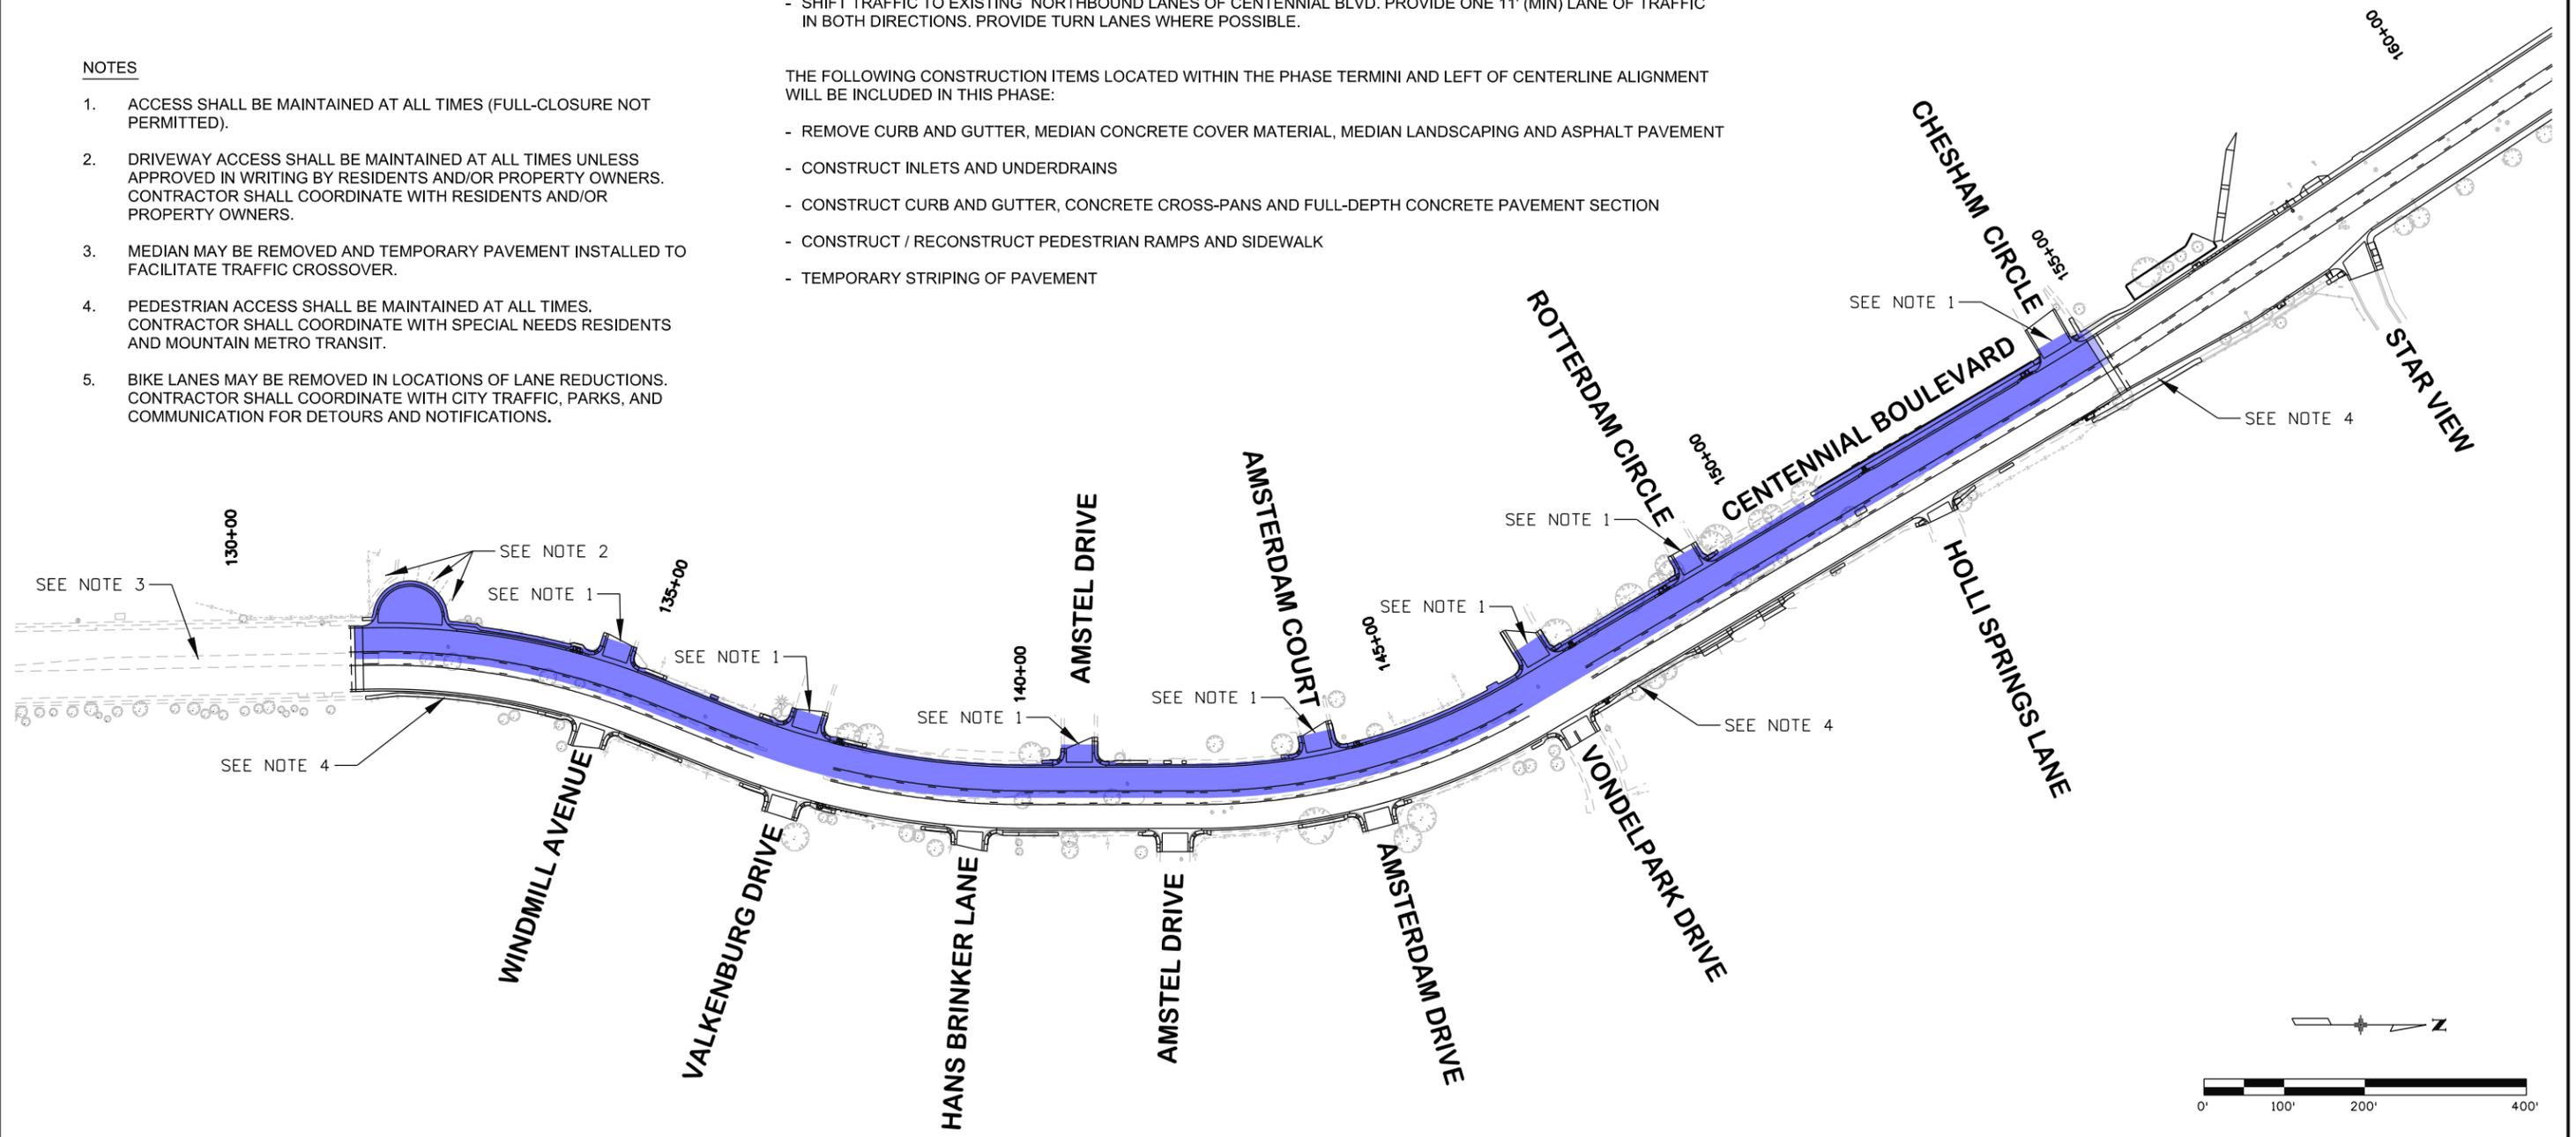

JALOEPP 1:24:48 PM p:\A\BQP\WINT01\wilsonco.com\Projects\Documents\8100-TRN\City of Colorado Springs\15-100-044-00_Cent. Blvd Reconst GOG to Fill\000001Traffic_ITSDrawings\Construction Phasing Plan- Ph03

| | | | | | | | | | | | | |
|--|---------------|------------------|-------------|-------------------|--|---|--|---|-----------------------|---------------------------------------|--|--|
| COMPUTER FILE INFORMATION | | REVISIONS | | STATEMENT: | | WILSON & COMPANY | | PPRTA | | CENTENNIAL BLVD RECONSTRUCTION | | |
| Creation Date: 03/22/16 | Initials: NAB | No. | Description | Date | THE CITY OF COLORADO SPRINGS RECOGNIZES THE DESIGN ENGINEER AS HAVING RESPONSIBILITY FOR THE DESIGN. THE CITY HAS LIMITED ITS SCOPE OF REVIEW ACCORDINGLY. | 5755 Mark Dabling Blvd, Suite 220 Colorado Springs, CO 80919 719.520.5800 | | City of Colorado Springs and PPRTA Contract T007780 | | | | |
| Last Modification Date: 4/26/2016 | Initials: NAB | | | | | | | CONSTRUCTION PHASING PLAN | | | | |
| Drawing File Name: Construction Phasing Plan- Ph03 | | | | | | | | PHASE 3 | | | | |
| MicroStation Ver. 08.11.07 | Scale: 1:200 | | | | | | | Subset: CPP | Subset Sheets: 3 of 5 | Sheet No: 15 | | |
| DESIGNED BY: MAK | DRAWN BY: NAB | CHECKED BY: DJE | | | | | | | | | | |